

Web Signage Appliance SA1000/ SA2000



Key Features:

- Microsoft® Windows® XP Embedded operating system
- Intuitive, web-based remote content and device administration
- Compact size for ease in installation and mounting
- Fan or Fanless, HDD or Flashed based storage
- Optional wireless networking
- Support for numerous media formats (e.g., images, videos, Flash, URL, RSS, PowerPoint)
- Real-time or scheduled content playback
- Flexible screen layout options with multiple zones and layers
- Automatic content download recovery

The Web Signage Appliance enables efficient deployment of a digital signage system. The reliable hardware together with an innovative server software suite, facilitates the creation of a unique and powerful communications medium that offers unparalleled opportunities to capture an audience's attention at key decision-making locations. When connected to a display, the Web Signage Appliances are ready to deliver timely, targeted communications, to the right place, at the right time.


The Web Signage Appliances feature powerful and high-performance processors in compact and robust packages. The Web Signage Appliances power displays with dynamic content while communicating with the server for continuous updates. With VGA and HDMI outputs, the network-ready Web Signage Appliances offer efficient and flexible deployments.

Web Content Manager

The web-enabled Web Content Manager software provides central management of Web signage appliances as media players, and automates the design and distribution of a wide variety of multimedia file format. With the Web Content Manager, the message to be played is assembled, scheduled, and delivered for dynamic playback over a network of appliances using standard file formats and protocols.

Feature Highlights:

- Groups and Players
- Media Management
- Ticker
- Multiple-zones
- Preset Templates
- Playlists
- Scheduling
- Urgent Casts
- System Management
- Reporting
- Auto Recovery

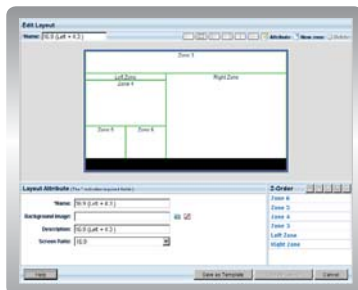


Web Device Manager

Web Device Manager offers comprehensive management, and provides a web browser interface fronting a database management system which supports a network of Web signage appliances over the LAN, WAN, or wireless networks.

The Web Device Manager utilizes "push and pull" technology to interact with remote appliances, allowing system administrators to inventory hardware, update applications and registry entries, shutdown/reboot/wake-up devices, update system firmware and software, along with access to advanced logging and scheduling capabilities.

Feature Highlights:

- Client Inventory
- History and Job Manager
- Scheduling
- Group Management
- Appliance Shutdown
- WakeOnLan
- Image Management
- File Package
- BIOS Management
- Database Support

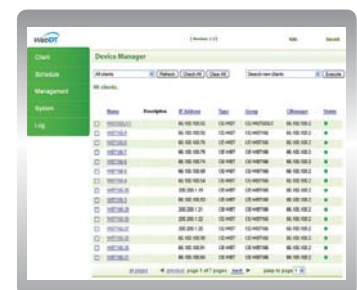

Comparison Chart

Products	Item	SA1000	SA2000
System	Processor	1.5GHz x86 Processor	1.6GHz/ 2GHz AMD Sempron™
	RAM	512MB or 1 GB (DDR II SODIMM x 1)	1GB or 2GB (DDR II SODIMM x 1)
	Storage	1GB, 2GB, 4GB or 8GB	4GB, 8GB or 16GB
	Display	Up to 1920x1080	Up to 1920x1080
	Operating System	Microsoft® Windows® XP Embedded	
	Wireless Connection	10/100Mb BaseT LAN/ WIFI 802.11 a/b/g	
	I/O Ports	DVI-I (1) Audio jack (3) USB port (4) RJ45 connector for Ethernet (1) DC-in jack (1) S-Video input (1) Composite video-in (1) ----- Optional: WIFI Dipole antenna (1)	VGA (1) HDMI (1) Audio jack (3) USB port (4) RJ45 connector for Ethernet (1) DC-in jack (1) S-Video input (1) Composite video-in (1) RS232 COM port (1) ----- Optional: WIFI Dipole antenna (1)
Mechanical	Dimension (H x W x D)	1.7" x 5.5" x 5.1"	1.96" x 5.5" x 6.5"
	Weight	1.2 lbs/ 544g	2.3 lbs/ 1050g (w/o fan)
Environmental	Regulatory	FCC Class B, CE, C-tick, RoHS compliant	
	Operating Temperature	0° – 40°C	
	Humidity	0% – 90% non-condensing	

* Specifications subject to change without notice.

Applications:

The Web Signage Appliance is ideal for the following applications:

- Retail
- Hospitality
- Casino/ Entertainment
- Government
- Transportation
- Kiosk
- Healthcare
- Finance



Call MIDCOM Today...
(800) 643-2664

Ask About our FREE
Try & Buy Program