

Call MIDCOM Today...
(800) 643-2664

M Series Industrial Monitors Series

M FEATURES

Standard

- 10.4", 12.1", 15", 17", & 19" TFT Displays
- High Luminance Displays
- Easy Access for Service
- Rugged Modular Steel Construction
- Direct CRT Replacement
- Panel Mountable
- Right Click Mouse Feature
- Resistant to Electromagnetic Emissions
- Standard (RGB) 15 pin output
- NEMA 4/4X/12 Rated Front Bezel

Optional

- Stainless Steel Bezel
- 24 Vdc



Ask About our **FREE**
Try & Buy Program

Industrial Monitors Series







Specifications

Model	10.4" M	12.1" M	15" M	17" M	19" M
Display Size	10.4" Diagonal	12.1" Diagonal	15" Diagonal	17" Diagonal	19" Diagonal
Panel Resolution	TFT VGA 600 x 480	TFT SVGA 800 x 600	TFT XGA 1024 x 768	TFT SXGA 1280 x 1024	TFT UXGA 1600 x 1200
Viewing Angle	X-Axis -60°/60° Y-Axis -50°/60°	X-Axis -60°/60° Y-Axis -55°/40°	X-Axis -65°/65° Y-Axis -60°/50°	X-Axis -70°/70° Y-Axis -60°/60°	X-Axis -88°/88° Y-Axis -88°/88°
Contrast Ratio	300:1	200:1	300:1	400:1	600:1
Bulb Life	CCFT @ 50,000 Hours	CCFT @ 50,000 Hours	CCFT @ 40,000 Hours	CCFT @ 50,000 Hours	CCFT @ 40,000 Hours
Brightness	400 nits	300 nits	250 nits	250 nits	250 nits
Lens	5 Wire Resistive Touch OR Anti-glare Lexan	5 Wire Resistive Touch OR Anti-glare Lexan	5 Wire Resistive Touch OR Anti-glare Lexan	5 Wire Resistive Touch OR Anti-glare Lexan	5 Wire Resistive Touch OR Anti-glare Lexan
Power Supply	External Brick 12VDC 100-240VAC, 47-63Hz	External Brick 12VDC 100-240VAC, 47-63Hz	External Brick 12VDC 100-240VAC, 47-63Hz	Internal Power Supply 100-240VAC, 50-60Hz	Internal Power Supply 100-240VAC, 50-60Hz
Temperature	0°-50°C (32°- 122°) op -25°-60°C (-4°-140°) non-op	0°-50°C (32°- 122°) op -25°-60°C (-4°-140°) non-op	0°-50°C (32°- 122°) op -25°-60°C (-4°-140°) non-op	0°-50°C (32°- 122°) op -25°-60°C (-4°-140°) non-op	0°-50°C (32°- 122°) op -25°-60°C (-4°-140°) non-op
Relative Humidity	10 - 95% non-condensing	10 - 95% non-condensing	10 - 95% non-condensing	10 - 95% non-condensing	10 - 95% non-condensing
Shock	10G operating 15G non-operating	10G operating 15G non-operating	10G operating 15G non-operating	10G operating 15G non-operating	10G operating 15G non-operating
Vibration	1G from 57-2000 Hz op 2.5G from 57-2000 Hz non	1G from 57-2000 Hz op 2.5G from 57-2000 Hz non	1G from 57-2000 Hz op 2.5G from 57-2000 Hz non	1G from 57-2000 Hz op 2.5G from 57-2000 Hz non	1G from 57-2000 Hz op 2.5G from 57-2000 Hz non

Call to Request a Quote
(800) 643-2664

Product and Mounting Dimensions

Industrial Monitor Series

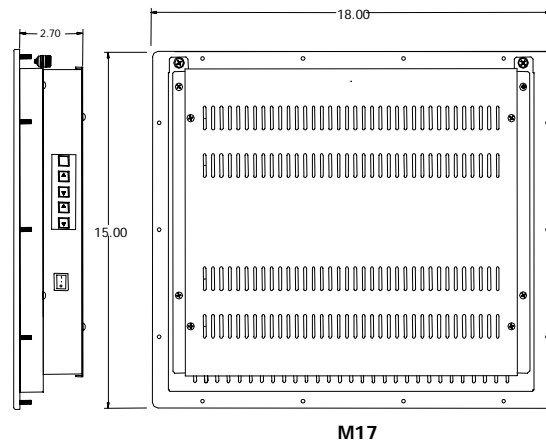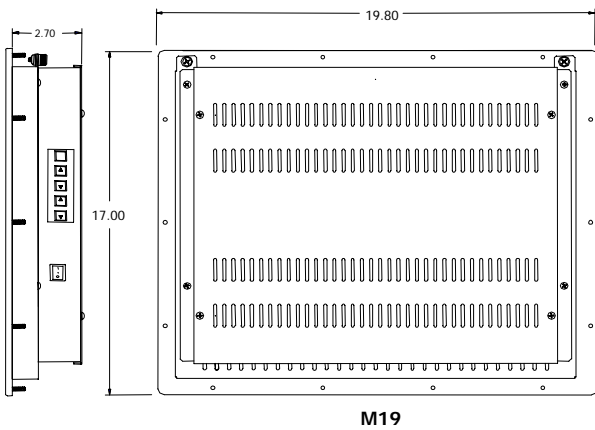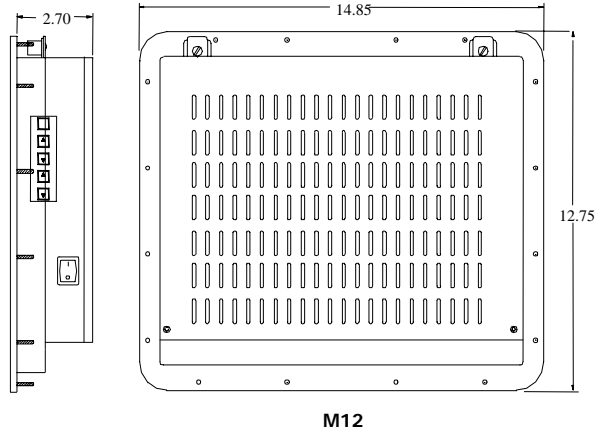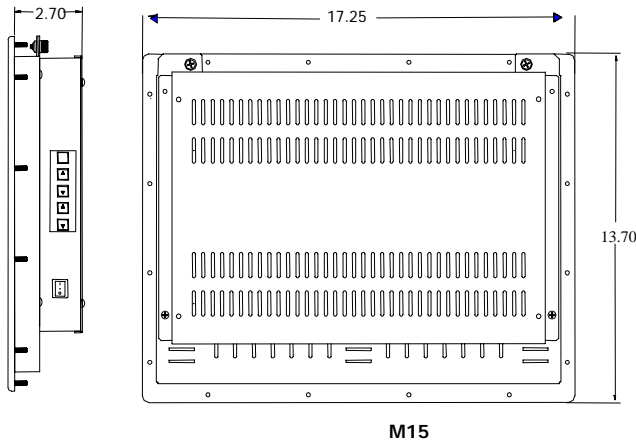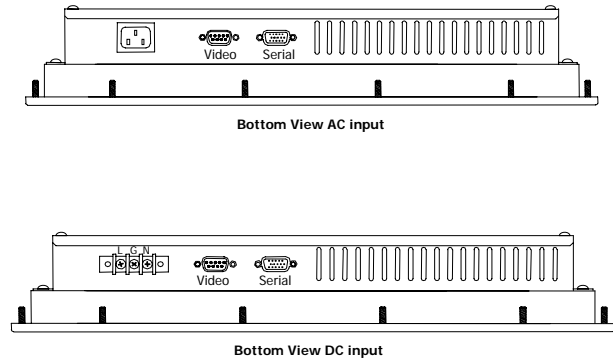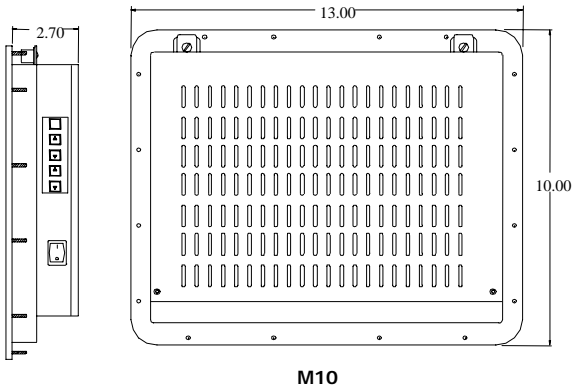

Call to Request a Quote
(800) 643-2664